



# Marvel Professional Built-in 36" All Freezer

Model # MP36FA2

## Performance

- Dynamic Cooling Technology™ air flow system ensures even circulation and optimal cooling environment for longer lasting food preservation
- Digital controls offer precise temperature stability within one degree
- Energy-efficient variable speed compressor chills food quickly while saving energy
- One of the quietest, technologically advanced compressors available
- Integrated ion air purifier eliminates airborne bacteria and mold spores, removes odors and enhances food preservation – and it never degrades or needs replacing
- Moisture-control evaporator removes excess humidity
- Maintenance-free anti-clog condenser coil prevents dust and other airborne particles from clogging the condenser

## Storage Capabilities

- 19.2 total cubic feet storage capacity
- 3 cantilevered full-width metal wire shelves easily adjust to accommodate various storage heights
- Full-width solid shelf to stack frozen items
- 4 half-width adjustable metal door bins and 1 full-width metal bin to securely store heavy items
- Factory-installed automatic crescent ice maker with large-capacity ice bin
- 3 clear-view metal storage drawers with tempered glass fronts
  - 1 glide-out ice drawer with two separate ice pans to maximize ice production and storage
  - 2 glide-out wire baskets with center divider to make freezer organization simpler

## Touchscreen Controls

- Max Freezer Mode: adjusts freezer temp to the coldest setting for 6 hours to freeze contents faster
- Door Open Alarm: alerts when door is left open for more than 3 minutes
- Power Loss Alarm: POWER indicator light flashes, in the case of a power loss
- Temperature Sensor Alarm: alerts of temperature sensor problems
- Sabbath Mode: disables interior lights and alarms for observance of the Sabbath

## Aesthetics

- Graduated theater lighting with bright, energy-efficient LED illumination from top and sidewalls for better visibility
- Robust hinge allows optimal door rotation and maximum durability
- Adjustable door stops at 90, 110 and 120 degrees

## Additional Convenience

- 2-year full product warranty, 6-year full sealed refrigeration system warranty, 90-day full cosmetic parts and 12-year limited sealed refrigeration system warranty



Slim Designer Handle Shown (MP36FA2RS)



## Ordering Options

Solid Stainless Steel Door, Right Hinge, Slim Designer Handle	MP36FA2RS
Solid Stainless Steel Door, Left Hinge, Slim Designer Handle	MP36FA2LS
Panel-Ready Solid Overlay Door, Right Hinge (Handle Not Included)*	MP36FA2RP
Panel-Ready Solid Overlay Door, Left Hinge (Handle Not Included)*	MP36FA2LP

## Optional Accessories

Professional Handle - Vertical Door Installation (qty 1)	42249470
Flush Mount Trim Kit	PBIRFTKSS
66" W Grille Kit	DDGK663SS
72" W Grille Kit	DDGK723SS

\*Consult your cabinet maker for overlay panel and handle options

## Finish Options



Stainless Steel




Solid Overlay (Panel Ready)\*

## Optional Professional Handle



# Marvel Professional Built-in 36" All Freezer

Model # MP36FA2

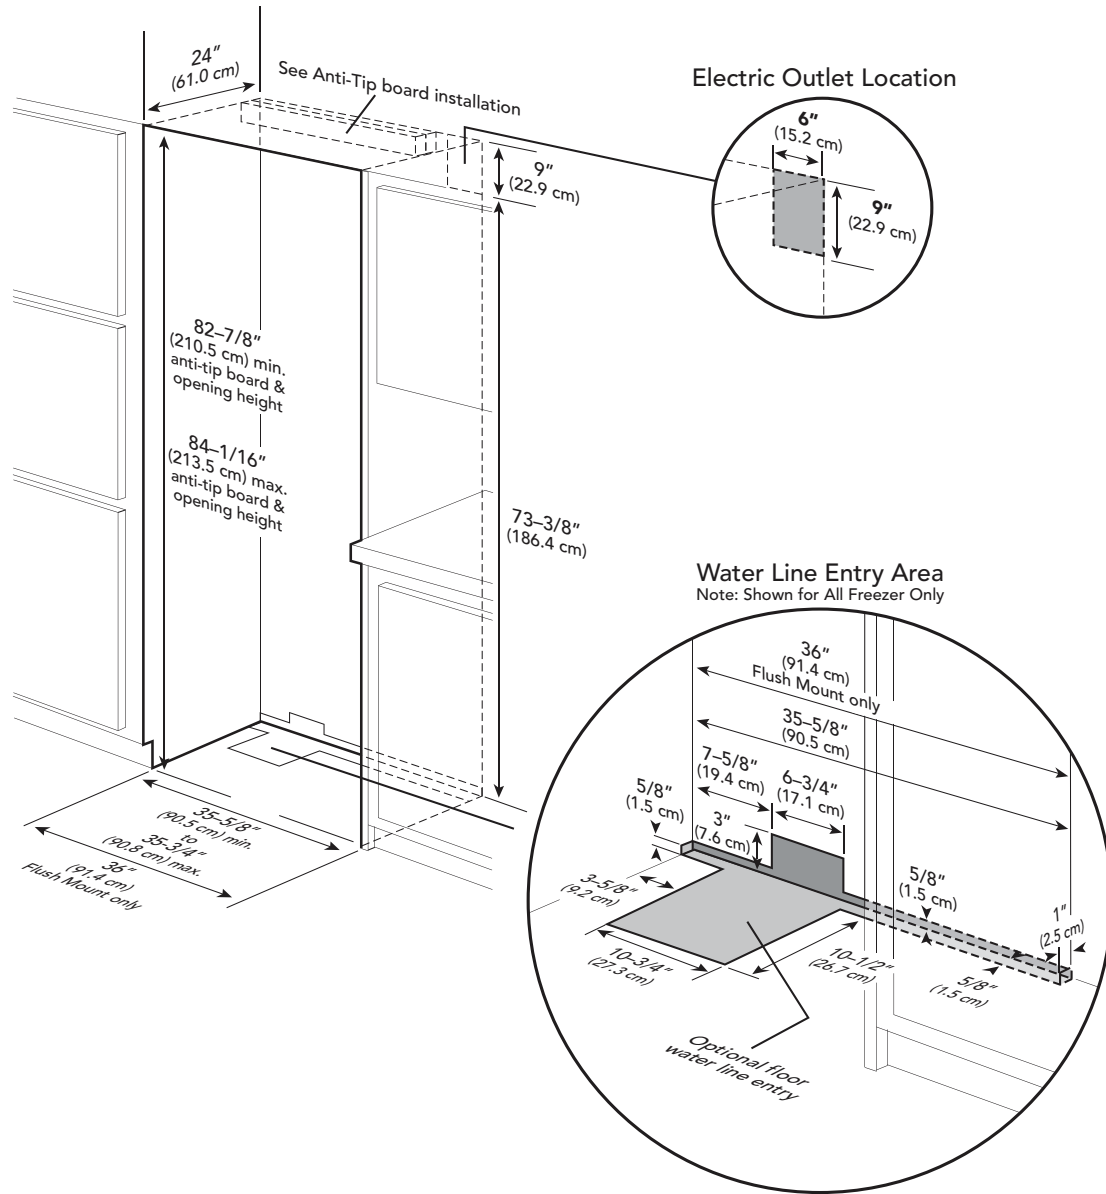

Width	36" (91.5 cm)
Overall Height (from bottom)	82-3/4" (210.2 cm) min to 84-1/16" (213.5 cm) max
Depth to front edge of side trim	22-3/16" (56.4 cm)
Depth to front of top grille	24" (61.0 cm)
Depth to front of handle endcap	26-1/2" (67.3 cm)
Cutout Width	35-5/8" (90.5 cm) min to 35-3/4" (90.8 cm) max
Cutout Height	82-7/8" (210.5 cm) min to 84-1/16" (213.5 cm) max
Cutout Depth	24" (61.0 cm) min

Electrical Requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product
Water Requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi
Maximum Amp Usage	9.5 amps
Length of Power Cord	4 1/2 ft. (137 cm)
Total Capacity	19.2 cu. ft. (544 liters)
Approximate Shipping Weight	605 lb. (274.4 kg)
Interior Finish	Arctic White
Shelving System	Cantilevered
Shelf Fronts	Arctic White
Other Storage	Drawers

Interior Lighting	White LED Lighting (Top, Sidewalls)
Toe Grill Finish	Stainless Steel
Hinge	Zero Clearance
Handle	Designer (Handle not included on Overlay Models)
Control Type	Digital Controls
Temperature Range	-5°F to 5°F (-20.6°C to -15°C)
Lock	No
Finishes	Stainless Steel, Overlay
Agency Approvals	UL

\*Specifications subject to change without notice. This spec sheet is intended only for quick reference. For complete installation details, consult the owner's guide on [marvelrefrigeration.com](http://marvelrefrigeration.com).